




Submersible Turbine Pumps Data

200.D.01 *(Effective April, 2013)*

MODEL	Motor Size	"A"	"B"	"C"	One Stage "D"	"E"	One Stage Shaft Length	Disch. Sizes	First Stage Weight	Add'l Stage Weight		
5C	4	8.25	4.63	3.31	16.19	5.64	12.88	3,4	44	13		
	6	10.56			18.50		13.63		49			
5T	4	8.25	4.81		16.38		13.06		44			
	6	10.56			18.69		13.81		49			
5RWA	4	8.38	4.00		15.69		13.25		44			
	6	10.56			17.88		13.75		49			
6C	4	8.44	5.13	3.75	17.31	6.28	13.63	3,4,5	50	17		
	6	10.56			19.44		14.25		55			
	8	12.50			21.38		15.38		60			
6DH	4	4.94	5.50		14.19	10.63	41					
	6	9.75			19.00	13.75	53					
6RA	6	10.56	3.75		18.06	5.94	12.88	3,4	90	20		
7C	6	12.88	6.38	3.63	22.88	7.50	18.50	5,6	75	28		
	8	14.56			24.56		19.25		87			
7RA	6	8.44	4.50		16.56	7.90	11.50	3,4	105	28		
7T	6	12.88	7.09		23.59	7.50	19.06	5,6	78	31		
	8	14.56			25.28		19.94		90			
7WA	6	12.88	5.50		22.00		17.75		68			
	8	14.56		23.69	18.50	80						
8FD	6	12.88	8.25	24.75	7.90	20.50	4,5,6	125	34			
	8	14.56		26.43		21.37		137				
8I	6	12.88	6.38	22.88		18.13		90				
	8	14.56		24.56		18.88		102				
8RA	6	12.88	5.00	21.50		7.90		17.25		5,6	165	36
	8	14.56		23.19				18.13			177	
8RJ	6	12.88	6.50	23.00	17.50		90					
	8	14.56		24.69	18.88	102						
9RA	6	12.88	5.50	22.00	9.81	17.50	4,5,6	185	46			
	8	14.56		23.69		18.50		197				
9RC	6	15.13	8.50	28.13		24.25		194				
	8	13.25		26.25		21.50		206				
	10	13.25		26.25		20.50		206				
9T	6	15.13	9.25	28.88		25.00		200				
	8	13.25		27.00	22.25	212						
9WA	10	13.25	6.63	27.00	10.00	21.25	5,6,8	212	70			
	6	15.13		26.25		22.38		158				
	8	13.25		24.38		19.63		170				
10DH	10	13.25	9.25	24.38		4.50		18.63		6,8	170	58
	8	13.25		27.00				22.00			185	
	12	13.25		27.00				21.00			190	
10RA	6	15.13	6.63	26.25	10.00	22.38	4,6,8	280	76			
	8	13.25		24.38		19.63		285				
	10	13.25		24.38		18.63		285				
10RJ	6	15.13	8.40	28.03		4.50		23.38		6,8	187	60
	8	13.25		26.15				20.75			192	
	10	13.25		26.15				19.75			192	
10WA	6	15.13	7.63	27.25	10.00	23.38	4,6,8	183	56			
	8	13.25		25.38		20.63		188				
	10	13.25		25.38		19.63		188				
11C	8	13.25	9.88	5.13		11.50		23.75		6,8,10	285	97
	10	13.25		28.25				23.75			285	
	12	13.25		28.25				22.75			285	
11RA	6	14.44	8.00	5.88	12.10	28.31	6,8,10	415	103			
	8	13.25		27.13		22.25		415				
	10	13.25		27.13		21.25		415				

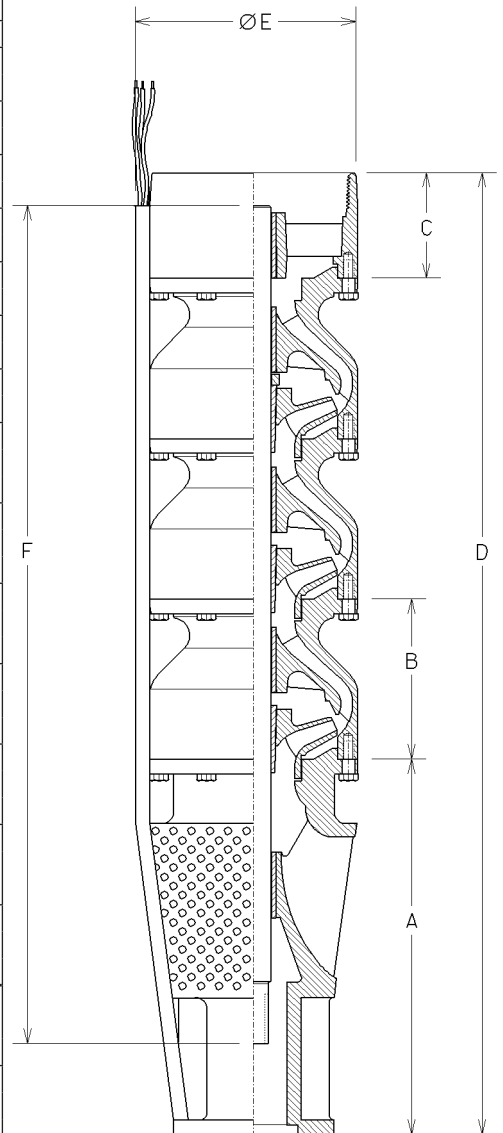


All dimensions are in inches and weights in lbs.

Submersible Turbine Pumps Data

200.D.01A *(Effective April, 2013)*

MODEL	Motor Size	"A"	"B"	"C"	One Stage "D"	"E"	One Stage Shaft Length	Disch. Sizes	First Stage Weight	Add'l Stage Weight					
11WA	8	13.25	8.75	5.13	27.13	11.50	23.00	5, 6, 8	275	90					
	10						23.00								
	12						22.00								
12C	8	19.00	11.00	6.25	36.25	12.10	30.25	6, 8, 10	345	124					
	10						30.25								
	12						29.25								
12FD	8		12.25		6.25	37.50	12.10	12.10	32.25	8, 10	360	129			
	10								32.25						
	12								31.25						
12FR	8	16.50	12.50	35.25	12.10	12.10	30.00	10	350	129					
	10						30.00								
	12						29.00								
12WA	8	13.25	9.00	5.88	28.13	12.10	23.25	6, 8, 10	250	95					
	10						23.25								
	12						22.25								
12RJ	8	19.00	9.60	5.88	34.48	12.10	29.63	6, 8, 10	310	95					
	10						29.63								
	12						28.63								
13C	8	20.00	11.13	6.25	37.38	13.75	32.50	8, 10	425	150					
	10						32.50								
	12						31.50								
13RA	8		9.50		5.25	34.75	13.75	13.75	29.50	8, 10	505	164			
	10								29.50						
	12								28.50						
14F	10	21.00	13.63	8.63	43.25	15.00	37.38	10, 12	680	195					
	12	23.75			46.00		39.13								
	14	24.25			46.50		39.63								
14RH	10	21.00			43.25	14.00	14.00				14.00	37.38	10, 12	445	155
	12											36.38			
	14											36.38			
14RJ	10	20.00	11.50	5.25	36.75	14.75	31.50	10, 12	445	155					
	12	20.00			36.75		30.50								
	14	21.00			37.75		31.50								
16DH	12	22.25	15.25	6.75	44.25	16.40	38.50	12, 14	914	292					
16DM	14	25.88		12.75	53.88	17.25	48.88		816	320					
	18B	16	30.75	13.00	8.00	51.75	18.68	47.25	12, 14	1350	354				
18D	16.75			55.50		18.88	51.25	1470		482					
18H	17.63			56.38		19.12	51.25	1370		371					
18L	18.63			N/A		49.25	19.12	40.37		1450	456				
20B	R/F	R/F	16.31	R/F	R/F	R/F	20.88	R/F	R/F	395					
20E			18.00				20.06			392					
20G			21.50				21.88			519					
20H			14.50				20.88			462					

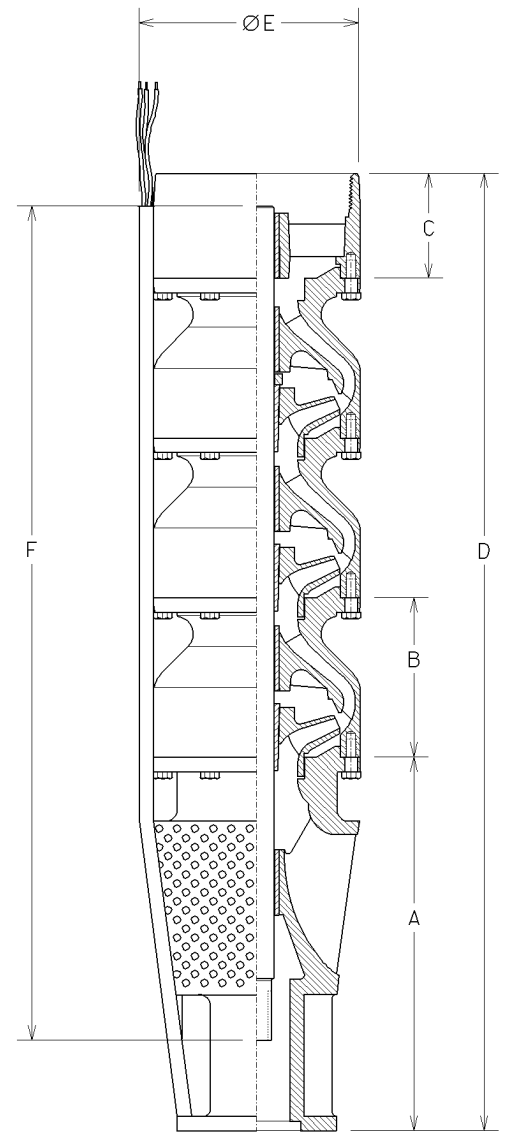

All dimensions are in inches and weights in lbs.

Xylem Inc.
www.bellgossett.com



Bell & Gossett
a xylem brand