


CROSS-REFERENCE GUIDE AND DIMENSIONAL INFORMATION

CAST IRON CIRCULATORS

Bell & Gossett	Dimensions (inches)			Cross Reference	
	A	B	C	Taco	Grundfos
NRF-9F/LW	5 9/16	6 3/8	4 7/8	005	—————
NRF-22	5 9/16	6 3/8	4 7/8	007 or 008	UP 15-42F (BRUTE)
NRF-33	6 3/16	6 3/8	5 1/8	0010	—————
NRF-36	6 7/8	6 3/8	5 3/4	0013, 0011 or 0014	UP 26-99, UP 26-96 or UP 26-64
NRF-45	7 3/8	8 1/2	5 3/4	—————	UP 43-75
PL-30	8 5/8	6 3/8	4 3/8	0014	UP 26-64F
PL-36	8 5/8	6 3/8	4 3/8	0013	UP 26-99F or UP 26-116F
PL-45	9 1/8	8 1/2	4 5/8	—————	UP 43-75F
PL-50	9 1/8	8 1/2	4 5/8	0012	UPS 32-40
PL-55	9 9/16	6 3/8	4 3/4	—————	—————
PL-75	9 15/16	8 1/2	5 3/16	—————	UPS 40-40
PL-130	10 3/4	8 1/2	5 3/16	—————	UPS 40-80/4

- The Series PL circulators are close-coupled, mechanical seal (dry motor) design. All others are wet rotor design.
- The UPS is a 3-speed circulator.

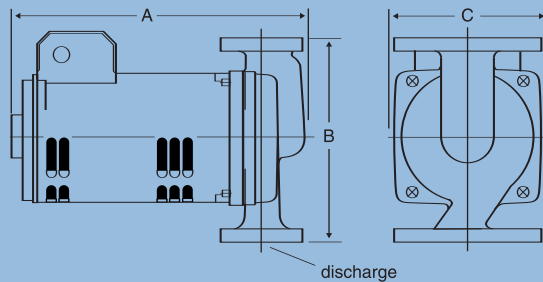

BRONZE CIRCULATORS FOR POTABLE WATER

Bell & Gossett	Dimensions (inches)			Cross Reference	
	A	B	C	Taco	Grundfos
NBF-8S/LW	5 7/32	5	4 7/8	003B	UP 15-10B5
NBF-9U/LW	5 1/16	6 1/8	4 7/8	006B	UP 15-18SU*
SSF-9U/LW	5 1/16	6 1/8	4 7/8	006B	UP 15-18SU*
NBF-10S/LW	5 7/32	5	4 7/8	006B	UP 15-18B5
NBF-12F/LW	5 9/16	6 3/8	4 7/8	005B	UP 15-42SF*
SSF-12F/LW	5 9/16	6 3/8	4 7/8	005B	UP 15-42SF*
NBF-12U/LW	5 1/16	6 1/8	4 7/8	005B	UP 15-42SU*
SSF-12U/LW	5 1/16	6 1/8	4 7/8	005B	UP 15-42SU*
NBF-18S	5 7/32	5	4 7/8	—————	UP 15-42B5
NBF-22	5 9/16	6 3/8	4 7/8	007B or 008B	UP 25-64SF*
NBF-22U	5 1/16	6 1/8	4 7/8	007B or 008B	UP 25-64SU*
SSF-22U	5 1/16	6 1/8	4 7/8	007B or 008B	UP 25-64SU*
NBF-33	6 3/16	6 3/8	5 1/8	0010B	—————
NBF-36	6 7/8	6 3/8	5 3/4	0013B, 0011B or 0014B	UP 26-99BF, UP 26-96BF or UP 26-64SF
NBF-45	7 3/8	8 1/2	5 3/4	—————	UP 43-75
PL-30B	8 5/8	6 3/8	4 3/16	0014B	UP 26-96BF
PL-36B	8 5/8	6 3/8	4 3/16	0013B	UP 26-99BF
PL-45B	9 1/8	8 1/2	4 5/8	—————	UP 43-75BF
PL-50B	9 1/8	8 1/2	4 5/8	0012B	UPS 32-40B
PL-55B	9 9/16	6 3/8	4 3/16	—————	—————
PL-75B	9 15/16	8 1/2	5 3/16	—————	UPS 40-40B
PL-130B	10 3/4	8 1/2	5 3/16	—————	UPS 40-80/4B

* Circulators have a 304 stainless steel pump body.

- The Series PL circulators are close-coupled, mechanical seal (dry motor) design. All others are wet rotor design.
- The UPS is a 3-speed circulator.