


5000 GPM

OCTOBER 2012

SUPERSEDES ALL PREVIOUS ISSUES

USE FOR SECOND STAGE ONLY

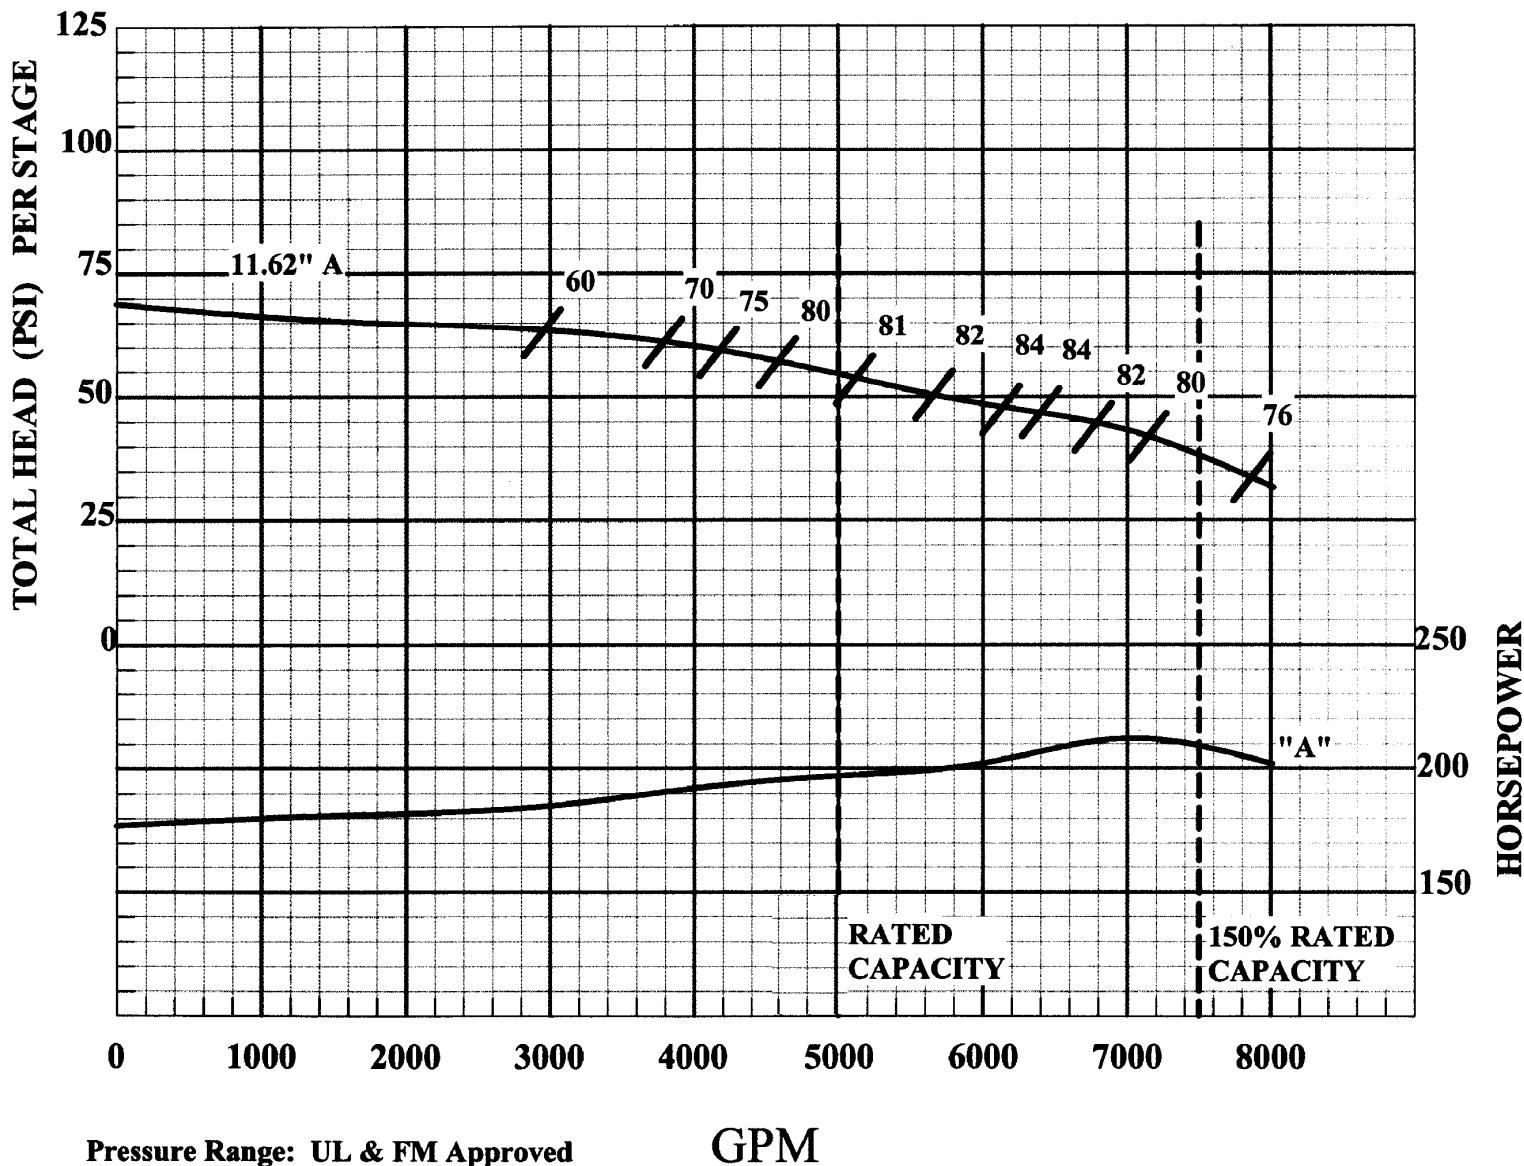

| |
|--|
| Curve No. 5000FP20EHC-2 |
| Model: FP20EHC |
| RPM: 1770 |
| Efficiency Correction |
| Perf based on STD materials |
| Impeller: B02407B |
| NS = 3651 K = 30.3 LBS/FT 45.1 KG/M |
| Characteristics based upon pumping clear non-aerated water. Rating point only is guaranteed. Column loss not included. |

Pressure Range: UL & FM Approved
127 - 294Ft (55 - 127 PSI)

GPM