




2DES

SUBMERSIBLE EFFLUENT PUMP Performance Curves

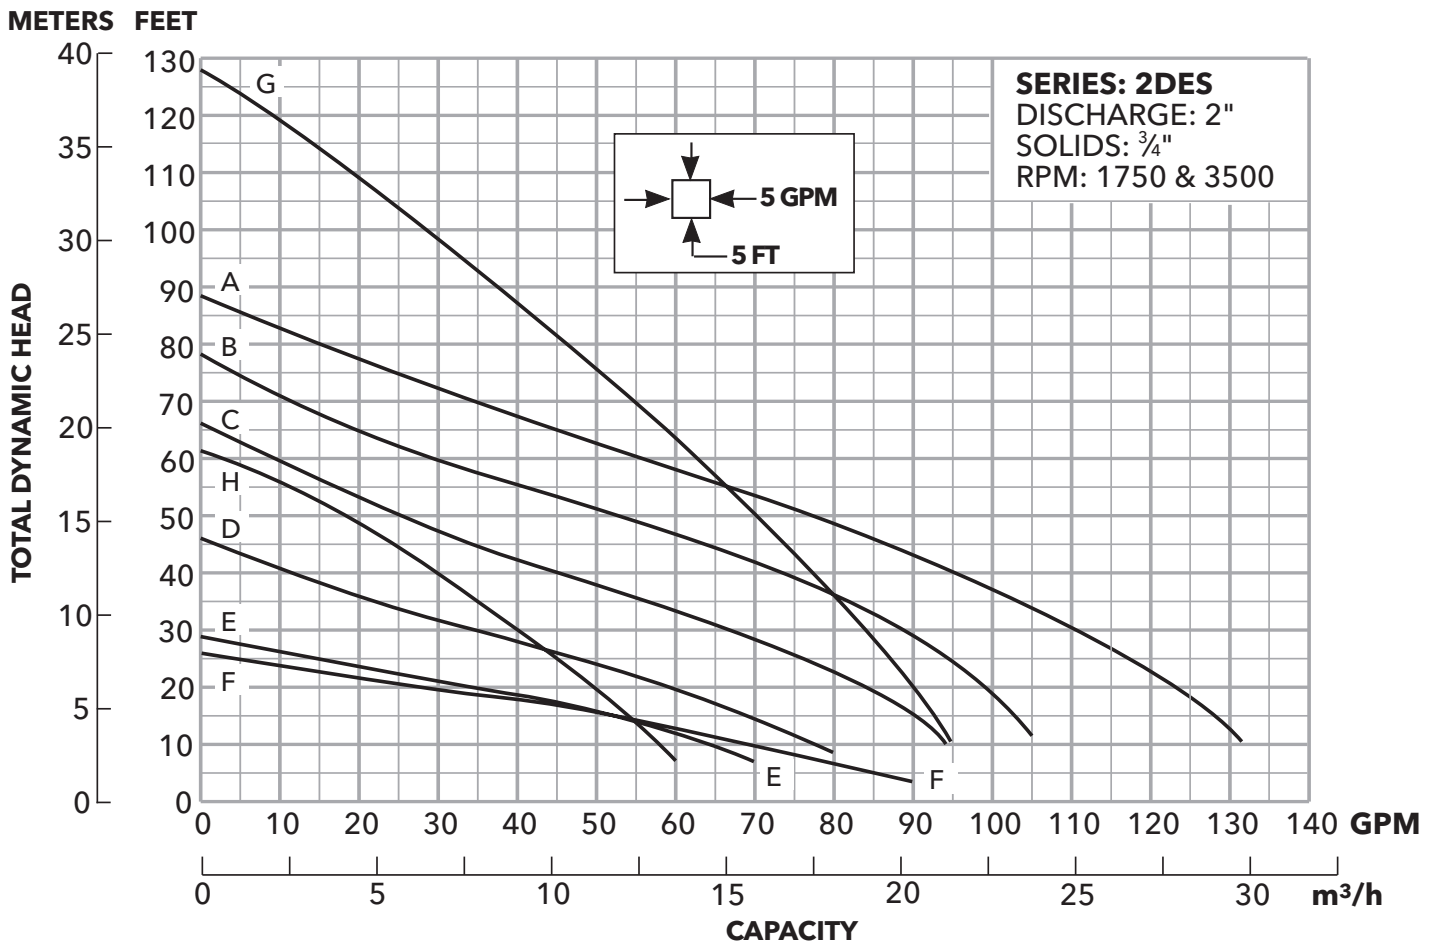

| Impeller and Curve Code | Impeller Diameter | Motor HP Rating |
|-------------------------|-------------------|-----------------|
| A | 4.56" | 1.5 |
| B | 4.44" | 1 |
| C | 4.06" | .75 |
| D | 3.56" | .5 |
| E ^① | 5.38" | .33 |
| F ^② | 5.38" | .33 |
| G | 5.5" | 1.5 |
| H | 3.88" | .5 |

① E code signifies a standard casing.
② F code signifies a lower head/higher flow casing.
E & F = Same impellers used with (2) different casings.

Xylem Inc.

2881 East Bayard Street Ext., Suite A
Seneca Falls, NY 13148

Phone: (866) 325-4210 Fax: (888) 322-5877

www.xylem.com/brands/bellgossett

Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.

© 2012 Xylem Inc. C2DES R2 November 2012



Bell & Gossett

a **xylem** brand