




JOB: _____  UNIT TAG: _____ ENGINEER: _____ CONTRACTOR: _____	REPRESENTATIVE: _____  ORDER NO. _____ SUBMITTED BY: _____ APPROVED BY: _____	DATE: _____ DATE: _____ DATE: _____
---	---	---



# 1.5AD-es

## Series e-1510

### Centrifugal Pumps - Base Mounted

**SPECIFICATIONS**

FLOW \_\_\_\_\_ HEAD \_\_\_\_\_  
 HP \_\_\_\_\_ RPM \_\_\_\_\_  
 VOLTS \_\_\_\_\_  
 CYCLE \_\_\_\_\_ PHASE \_\_\_\_\_  
 ENCLOSURE \_\_\_\_\_  
 APPROX. WEIGHT \_\_\_\_\_  
 SPECIALS \_\_\_\_\_  
 \_\_\_\_\_

**MATERIALS OF CONSTRUCTION**

Stainless Steel Fitted

**FEATURES**

- ANSI/OSHA Coupling Guard
- Center Drop Out Spacer Coupling
- Fabricated Heavy Duty Baseplate


**MAXIMUM WORKING PRESSURE**

175 psi (12 bar) W.P.

**TYPE OF SEAL**


- Standard Seal  
(Buna-Carbon/Silicon Carbide)
- F Standard Seal w/ Flush Line  
(Buna-Carbon/Silicon Carbide)

**Note: Equipped with NEOPRENE coupling**

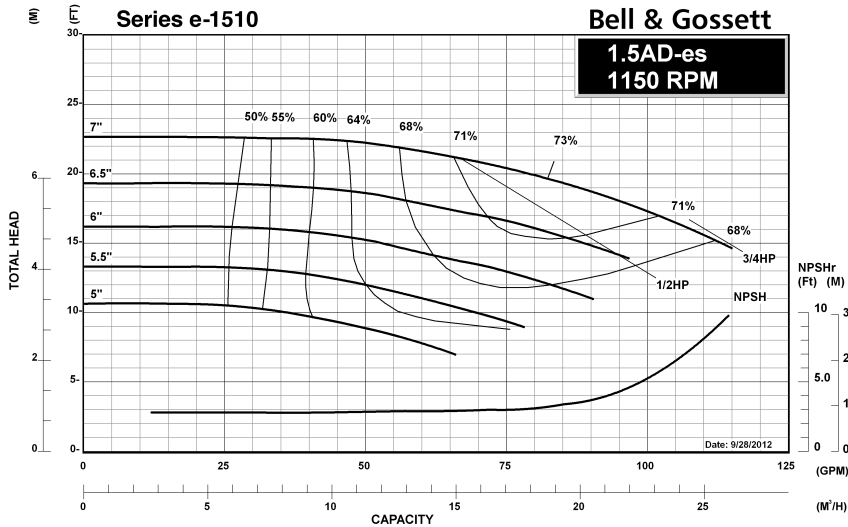



<b>JOB:</b>	<b>REPRESENTATIVE:</b>	
<b>UNIT TAG:</b>	<b>ORDER NO.</b>	<b>DATE:</b>
<b>ENGINEER:</b>	<b>SUBMITTED BY:</b>	<b>DATE:</b>
<b>CONTRACTOR:</b>	<b>APPROVED BY:</b>	<b>DATE:</b>



# 1.5AD-es

## Series e-1510

### Centrifugal Pumps - Base Mounted

**SPECIFICATIONS**

FLOW \_\_\_\_\_ HEAD \_\_\_\_\_  
 HP \_\_\_\_\_ RPM \_\_\_\_\_  
 VOLTS \_\_\_\_\_  
 CYCLE \_\_\_\_\_ PHASE \_\_\_\_\_  
 ENCLOSURE \_\_\_\_\_  
 APPROX. WEIGHT \_\_\_\_\_  
 SPECIALS \_\_\_\_\_  
 \_\_\_\_\_

**MATERIALS OF CONSTRUCTION**

Stainless Steel Fitted

**FEATURES**

- ANSI/OSHA Coupling Guard
- Center Drop Out Spacer Coupling
- Fabricated Heavy Duty Baseplate


**MAXIMUM WORKING PRESSURE**

175 psi (12 bar) W.P.

**TYPE OF SEAL**


- Standard Seal  
(Buna-Carbon/Silicon Carbide)
- F Standard Seal w/ Flush Line  
(Buna-Carbon/Silicon Carbide)

**Note: Equipped with NEOPRENE coupling**

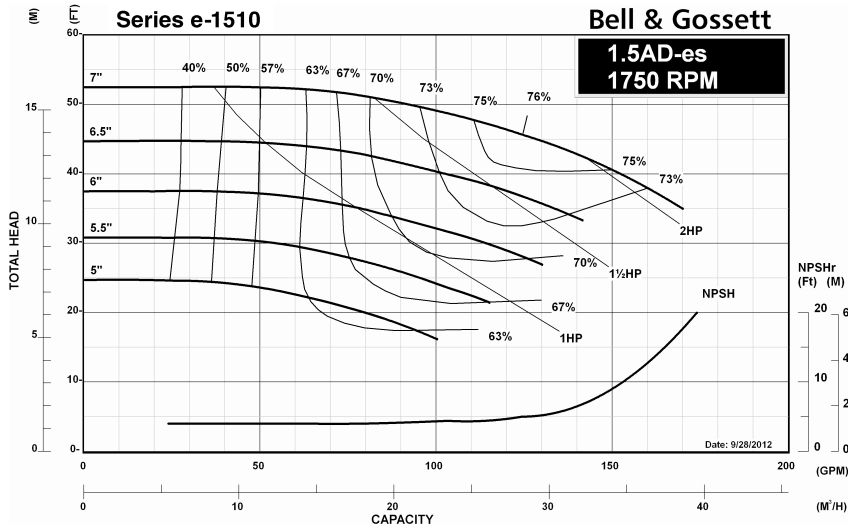

Series e-1510 1.5AD-es Centrifugal Pump Submittal

B-880.2B

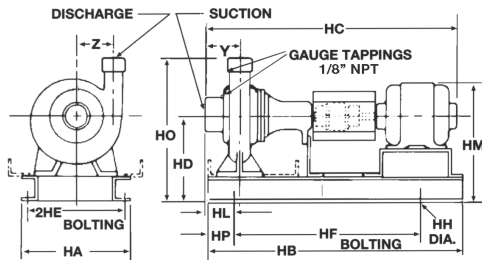

NOZZLE SIZES	
Discharge	1-1/2" N.P.T.
Suction	2" N.P.T.

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF	HH	HL	HM MAX	HO	HP	Y	Z
	"es" FRAME												
56	12 (305)	28-3/4 (730)	28-1/4 (718)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	3/4 (19)	3-1/16 (78)	13-3/8 (340)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
143T	12 (305)	28-3/4 (730)	28-3/8 (721)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	3/4 (19)	3-1/16 (78)	13-1/2 (343)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
145T	12 (305)	28-3/4 (730)	29-3/8 (746)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	3/4 (19)	3-1/16 (78)	13-1/2 (343)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
182T	14-5/8 (371)	31 (787)	32-1/8 (816)	9-3/4 (248)	12-7/8 (327)	25 (635)	3/4 (19)	1-11/16 (43)	15 (381)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)
184T	14-5/8 (371)	31 (787)	32-7/8 (835)	9-3/4 (248)	12-7/8 (327)	25 (635)	3/4 (19)	1-11/16 (43)	15 (381)	15-3/4 (400)	3 (76)	3-1/8 (79)	4-5/8 (117)

Dimensions are subject to change. Not to be used for construction purposes unless certified.



Xylem Inc.  
 8200 N. Austin Avenue, Morton Grove, IL 60053  
 Phone: (847)966-3700 Fax: (847)965-8379  
 www.bellgossett.com  
 Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.  
 © 2016 Xylem Inc.