




JOB:		REPRESENTATIVE:
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:

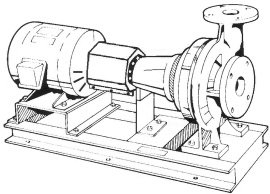

2AD-es Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

FEATURES

- ANSI/OSHA Coupling Guard
- Center Drop Out Spacer Coupling
- Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL


- Standard Seal (Buna-Carbon/Silicon Carbide)
- F Standard Seal w/ Flush Line (Buna-Carbon/Silicon Carbide)

Note: Equipped with NEOPRENE coupling

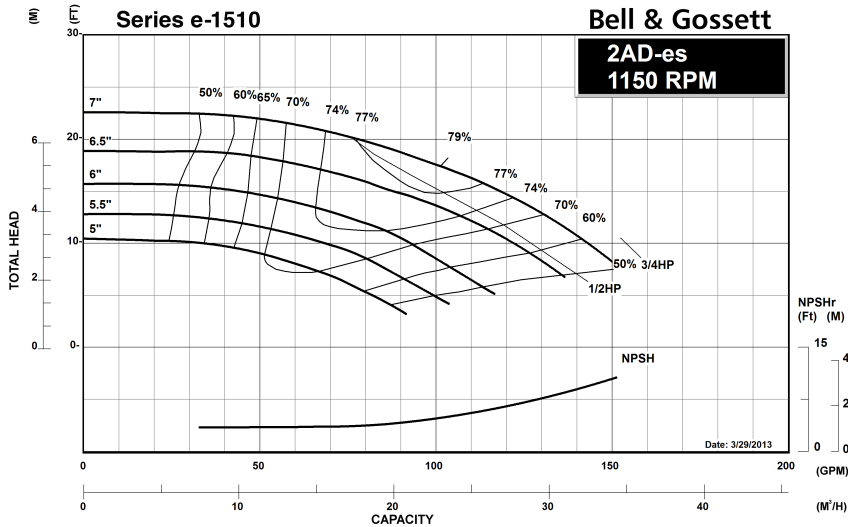



JOB:	REPRESENTATIVE:	
UNIT TAG:	ORDER NO.	DATE:
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:

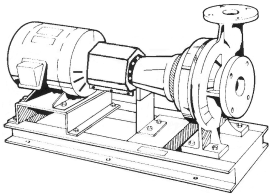

2AD-es Series e-1510 Centrifugal Pumps - Base Mounted

SPECIFICATIONS

FLOW _____ HEAD _____
 HP _____ RPM _____
 VOLTS _____
 CYCLE _____ PHASE _____
 ENCLOSURE _____
 APPROX. WEIGHT _____
 SPECIALS _____

MATERIALS OF CONSTRUCTION

Stainless Steel Fitted

FEATURES

- ANSI/OSHA Coupling Guard
- Center Drop Out Spacer Coupling
- Fabricated Heavy Duty Baseplate


MAXIMUM WORKING PRESSURE

175 psi (12 bar) W.P.
w/ 125# ANSI flange drilling

TYPE OF SEAL


- Standard Seal (Buna-Carbon/Silicon Carbide)
- F Standard Seal w/ Flush Line (Buna-Carbon/Silicon Carbide)

Note: Equipped with NEOPRENE coupling

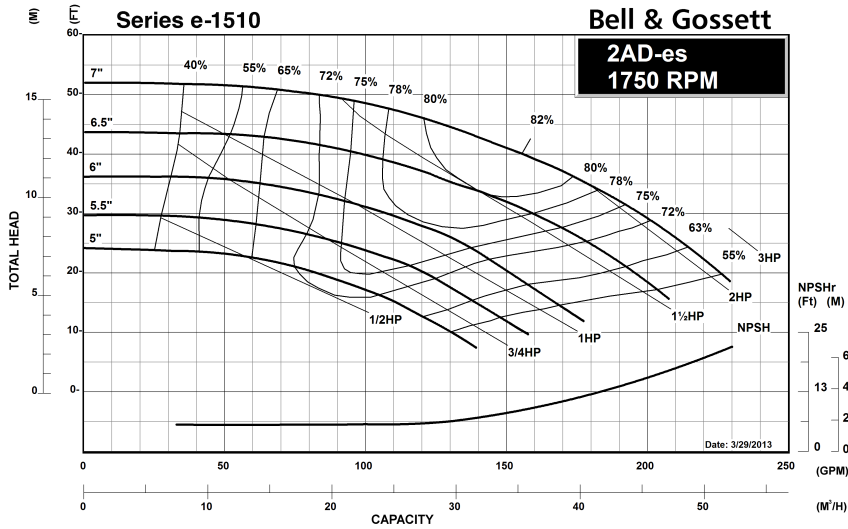

Series e-1510 2AD-es Centrifugal Pump Submittal

B-880.4B

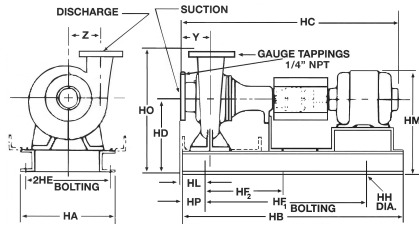

FLANGE DIMENSIONS IN INCHES (MM)			
	SIZE	THICKNESS	O.D.
Discharge	2"	5/8" (16)	6" (152)
Suction	2-1/2"	11/16" (17)	7-1/8" (181)

FLANGES ARE 125# ANSI - STANDARD

DIMENSIONS – Inches (mm)

STANDARD SEAL

MOTOR FRAME	HA	HB	HC MAX	HD	2HE	HF ₁	HF ₂	HH	HL	HM MAX	HO	HP	Y	Z
	"es" FRAME													
56	12 (305)	28-3/4 (730)	28-7/8 (733)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	-	3/4 (19)	3-9/16 (90)	13-3/8 (340)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
143T	12 (305)	28-3/4 (730)	29 (737)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	-	3/4 (19)	3-9/16 (90)	13-1/2 (343)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
145T	12 (305)	28-3/4 (730)	30 (762)	9-3/4 (248)	10-1/4 (260)	22-1/2 (572)	-	3/4 (19)	3-9/16 (90)	13-1/2 (343)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
182T	14-5/8 (371)	31 (787)	32-5/8 (829)	9-3/4 (248)	12-7/8 (327)	25 (635)	-	3/4 (19)	2-3/16 (56)	15 (381)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
184T	14-5/8 (371)	31 (787)	33-3/8 (848)	9-3/4 (248)	12-7/8 (327)	25 (635)	-	3/4 (19)	2-3/16 (56)	15 (381)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
213T	14-5/8 (371)	34-5/8 (879)	36 (914)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-3/16 (56)	15-5/8 (397)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)
215T	14-5/8 (371)	34-5/8 (879)	37-1/2 (953)	9-3/4 (248)	12-7/8 (327)	28-5/8 (727)	-	3/4 (19)	2-3/16 (56)	15-5/8 (397)	16-1/4 (413)	3 (76)	3-1/2 (89)	4-3/4 (121)

Dimensions are subject to change. Not to be used for construction purposes unless certified.



Xylem Inc.
 8200 N. Austin Avenue, Morton Grove, IL 60053
 Phone: (847)966-3700 Fax: (847)965-8379
 www.bellgossett.com
 Bell & Gossett is a trademark of Xylem Inc. or one of its subsidiaries.
 © 2016 Xylem Inc.