

BATTERIES, RACK, & CABLES

FIG. 1
 12V NEG.
 GROUND
 (2 BATTERIES)


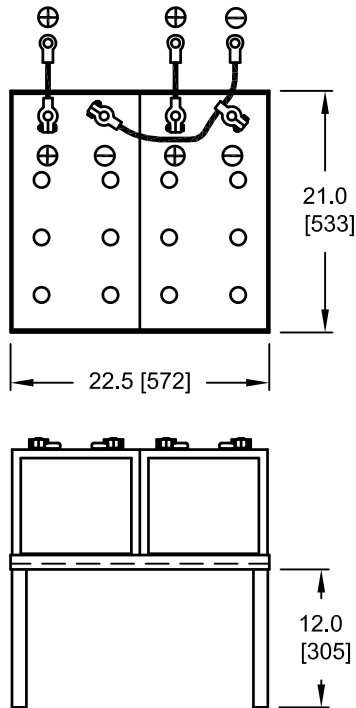


FIG. 2
 24V NEG.
 GROUND
 (4 BATTERIES)

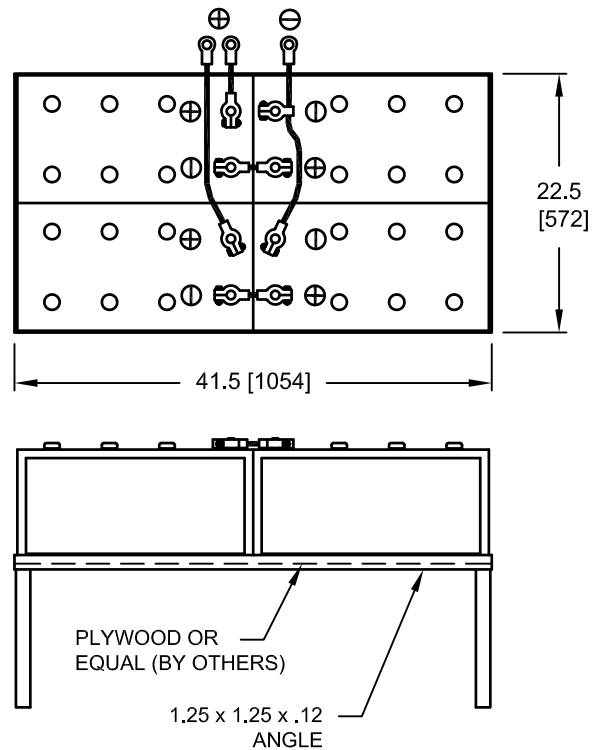

BATTERY SPECIFICATIONS									
BATTERY TYPE	COLD CRANKING AMPS @ 0 F	QUARTS OF ELECTROLYTE TO FILL	DIMENSIONS IN INCHES [MM]			WEIGHT IN LBS.		PART NUMBER	
			LENGTH	WIDTH	HEIGHT	DRY	WET		
8D	1400	18.0	20.8 [528]	11.1 [282]	9.8 [249]	80	130	AC2416	

NOTES:

1. ALL DIMENSIONS ARE INCHES [mm].
2. FOR NICKEL CADMIUM BATTERIES, CONSULT FACTORY.
3. BATTERIES ARE SUPPLIED DRY PER NFPA 20. ELECTROLYTE SUPPLIED BY OTHERS.
4. CABLES ARE 2/0 AWG STARTER WIRE CABLE WITH 6' EXTENSION FROM BATTERY TERMINAL TO ENGINE CONNECTION.
5. BATTERIES SHOULD BE INSTALLED USING 1/2" PLYWOOD OR EQUAL (BY OTHERS), BETWEEN THE BATTERIES AND RACK FOR BATTERY SUPPORT.

NOT FOR CONSTRUCTION, INSTALLATION OR APPLICATION PURPOSES UNLESS CERTIFIED		
CERTIFIED FOR:		
CUSTOMER ORDER NO.:	TAG NO.	
SHOP ORDER:	CERTIFIED BY:	DATE: